


PRODUCT DATA SHEET

MaxiChem® with TRIttech™ 76-830



| | |
|---------------------|--------------------------------|
| Colour – Coating | Green |
| Colour – Liner | White |
| Design | Gauntlet - 35 cm |
| Coating | NBR (Nitrile Butadiene Rubber) |
| Coating texture | Micro-Foam with Non-Slip Grip |
| Liner | Nylon, Spandex |
| Palm thickness (mm) | 0.90 |

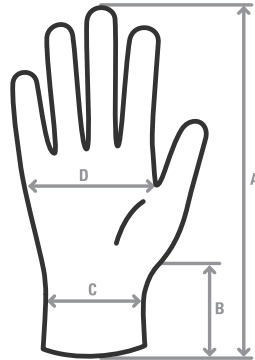

Dimensions

| Size Range | Size 7 (S) | Size 8 (M) | Size 9 (L) | Size 10 (XL) | Size 11 (XXL) |
|-------------------------------|------------|------------|------------|--------------|---------------|
| Total glove length (+/- 5 mm) | 350 | 350 | 350 | 350 | 350 |
| Palm width (mm) | 104 | 110 | 117 | 122 | 129 |
| Over lock colour | Red | Orange | White | Yellow | Black |

EN Test Results

| Test | Notified body | Result/Pass |
|------------------------------------|---------------|-------------|
| EN ISO 21420: 2020+A1:2024 | TÜV Rheinland | Yes |
| EN 388:2016 + A1:2018 | TÜV Rheinland | 4111A |
| EN ISO 374-1:2016 + A1:2018/Type A | TÜV Rheinland | JKLMNO |
| EN ISO 374-5:2016 | TÜV Rheinland | Yes |

Typical Performance Values

| | |
|---|--|
| EN ISO 21420: General requirements Dexterity | Level 5 |
| EN 388:2016 + A1:2018 A. Abrasion Resistance | > 8000 Cycles |
| EN 388:2016 + A1:2018 B. Cut Resistance | > 1.2 index |
| EN 388:2016 + A1:2018 C. Tear Resistance | > 10 newtons |
| EN 388:2016 + A1:2018 D. Puncture Resistance | > 20 newtons |
| EN 388:2016 + A1:2018 E. Cut Resistance ISO | ≥ 2 Newton |
| EN ISO 374-1:2016 + A1:2018 J - n-Heptane | 3 (>60 min) |
| EN ISO 374-1:2016 + A1:2018 K - Sodium hydroxide 40% | 6 (>480 min) |
| EN ISO 374-1:2016 + A1:2018 L - Sulphuric acid 96% | 2 (>30 min) |
| EN ISO 374-1:2016 + A1:2018 M - Nitric acid 65% | 6 (>480 min) |
| EN ISO 374-1:2016 + A1:2018 N - Acetic acid 99% | 3 (>60 min) |
| EN ISO 374-1:2016 + A1:2018 O - Ammonia 25% | 6 (>480 min) |
| EN ISO 374-5:2016 Protective gloves against microorganisms. | Protective gloves which form a protective barrier to microbiological agents. Not tested against viruses. |

PRODUCT DATA SHEET

MaxiChem® with TRItch™ 76-830

Permeation Breakthrough Times (BT)

| | | |
|---------------------------------|----------|---------------------------|
| Acrylic acid (79-10-7) | 3 (72) | CENTEXBEL |
| Formaldehyde (50-00-0) | 6 (>480) | Kroschke |
| Ethanol 92% (64-17-5) | 6 (>480) | Kroschke |
| Ethanol 70% (64-17-5) | 6 (>480) | Kroschke |
| Isopropanol 99% (67-63-0) | 6 (>480) | Kroschke |
| Gasoline (8006-61-9) | 2 (56) | Kroschke |
| Diesel (68476-34-6) | 6 (>480) | Kroschke |
| Petroleum (64742-88-7) | 4 (228) | Kroschke |
| n-Heptane (142-82-5) | 4 | ATG accredited laboratory |
| Hexane (110-54-3) | 5 | ATG accredited laboratory |
| Isooctane (540-84-1) | 6 | ATG accredited laboratory |
| Methanol (67-56-1) | 3 | ATG accredited laboratory |
| Phosphoric acid 85% (7664-38-2) | 6 | ATG accredited laboratory |
| Sulphuric acid (7664-93-9) | 3 | ATG accredited laboratory |

HandCare®

| | |
|--|-----------|
| Skin Health Alliance Dermatologically Accredited | Yes |
| REACH compliant | Yes |
| OEKO-TEX® Standard 100 - 08.BH.57867 Hohenstein HTTI | Certified |
| Sanitized® | Yes |



Special features

| | |
|--------------|-----|
| Liquid proof | Yes |
|--------------|-----|

Packaging

| | |
|------------------------|-----------------|
| Pairs per poly bag | 12 |
| Poly bags per carton | 6 |
| Carton count | 72 |
| Carton dimensions (mm) | 500 x 295 x 270 |

PRODUCT DATA SHEET

MaxiChem® with TRItch™ 76-830

Weight

| Size Range | Size 7 (S) | Size 8 (M) | Size 9 (L) | Size 10 (XL) | Size 11 (XXL) |
|----------------------------------|------------|------------|------------|--------------|---------------|
| Glove weight / pair (+/- 6 gram) | 124 | 132 | 140 | 150 | 158 |
| Gross weight (kg) | 9.9 | 10.5 | 11 | 11.8 | 12.4 |
| Carton weight (kg) | 1 | 1 | 1 | 1 | 1 |
| Net weight (kg) | 8.9 | 9.5 | 10.0 | 10.8 | 11.4 |

Issue date: 04/04/2023

