


SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiCut® Ultra™ 44-6745F



Boja – Premaz	Crna
Boja – Podstava	Crna
Dizajn	Premaz preko dlana
Premaz	NBR (nitril butadien guma)
Tekstura premaza	Mikro pjena
Podstava	Najlon, Poliester, UHMWPE, Spandeks, Tungsten
Debljina preko dlana (mm)	1.30

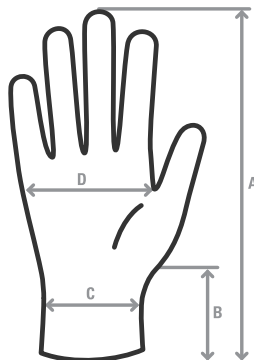

Dimenzije

Raspon veličina	Veličina 6 (XS)	Veličina 7 (S)	Veličina 8 (M)	Veličina 9 (L)	Veličina 10 (XL)	Veličina 11 (XXL)	Veličina 12 (XXXL)
Ukupna duljina rukavice (+/-5 mm)	210	220	235	240	250	250	255
Duljina zgloba (mm)	60	65	65	75	70	70	75
Širina zgloba (mm)	72	76	80	82	85	85	90
Širina dlana (mm)	85	87	93	96	100	103	105
Boja štepa	Plava	Crvena	Narančasta	Bijela	Žuta	Crna	Zelena

EN rezultati testiranja

Test	Tijelo za ocjenu sukladnosti	Rezultat/prolaz
EN ISO 21420:2020+A1:2024	TÜV Rheinland	Da
EN 388:2016 + A1:2018	TÜV Rheinland	4243F

Tipične vrijednosti performansi

EN ISO 21420: Opći zahtjevi Dexterity	Razina 5
EN 388:2016 + A1:2018 A. Otpornost na abraziju	> 8000 ciklusa
EN 388:2016 + A1:2018 B. Otpornost na razrezivanje	> 2,5 indeks
EN 388:2016 + A1:2018 C. Otpornost na kidanje	> 75 njutna
EN 388:2016 + A1:2018 D. Otpornost na probijanje	> 100 njutna
EN 388:2016 + A1:2018 E. Otpornost na razrezivanje ISO	≥ 30 njutna

SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiCut® Ultra™ 44-6745F

HandCare®

Dermatološki akreditirano od Skin Health Alliance	Da
REACH compliant	Da
OEKO-TEX® Standard 100 - 08.BH.57867 Hohenstein HTTI	Certificirano
Perivo	40°C/104°F
Sanitized®	Da



Posebne značajke

Pogodne za dodirni zaslon	Da
Bez silikona	Da
Kontakt s hranom (EU)	Da



Pakiranje

Pari po jednoj plastičnoj vrećici	12
Plastičnih vrećica po kartonskoj kutiji	6
Komada u kartonskoj kutiji	72
Dimenzije kartonske kutije (mm)	500 x 295 x 200

Težina

Raspon veličina	Veličina 6 (XS)	Veličina 7 (S)	Veličina 8 (M)	Veličina 9 (L)	Veličina 10 (XL)	Veličina 11 (XXL)	Veličina 12 (XXXL)
Težina rukavica / par (+/-6 gram)	47	50	56	60	64	68	70
Bruto težina (kg)	4.3	4.6	5	5.3	5.6	5.8	6
Težina kutije (kg)	1	1	1	1	1	1	1
Neto težina (kg)	3.3	3.6	4.0	4.3	4.6	4.8	5.0

SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiCut® Ultra™ 44-6745F

Datum izdavanja: 28/02/2024

