


SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiChem® Cut™ with TRIttech™ 76-833



Boja – Premaz	Zelena
Boja – Podstava	Bijela
Dizajn	Čvrsta rukavica - 35 cm
Premaz	NBR (nitril butadien guma)
Tekstura premaza	Mikro pjena s protukliznim prljanjanjem
Podstava	UHMWPE-staklo, Poliester, Spandeks
Debljina preko dlana (mm)	1.10

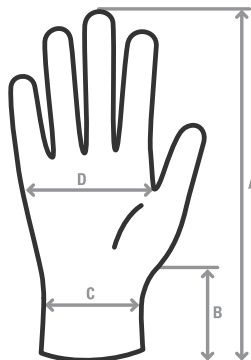

Dimenzije

Raspon veličina	Veličina 7 (S)	Veličina 8 (M)	Veličina 9 (L)	Veličina 10 (XL)	Veličina 11 (XXL)
Ukupna duljina rukavice (+/-5 mm)	350	350	350	350	350
Duljina zgloba (mm)			1		
Širina dlana (mm)	102	109	120	120	127
Boja štepa	Crvena	Narančasta	Bijela	Žuta	Crna

EN rezultati testiranja

Test	Tijelo za ocjenu sukladnosti	Rezultat/prolaz
EN ISO 21420:2020+A1:2024	CTC	Da
EN 388:2016 + A1:2018	CTC	4X21B
EN ISO 374-1:2016 + A1:2018/Tip A	CTC	JKLMNO
EN ISO 374-5:2016	CTC	Da

SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiChem® Cut™ with TRIttech™ 76-833

Tipične vrijednosti performansi

EN ISO 21420: Opći zahtjevi Dexterity	Razina 5
EN 388:2016 + A1:2018 A. Otpornost na abraziju	> 8000 ciklusa
EN 388:2016 + A1:2018 B. Otpornost na razrezivanje	Mehaničke opasnosti • A: Otpornost na habanje - broj trljanja (Razina 0-4) • B: Otpornost na posjekotine - Coupe Test - Indeks (Razina 0-5) • C: Otpornost na trganje - N (razina 0-4) • D: otpornost na probijanje N (razina 0-4) • E: TDM otpornost na rezove prema ISO 13997 - N (razina A-F)* • F: Zaštita od udaraca prema EN 13594:2015 - Da/N (P=Da)
<i>* Rezultati testa Coupe samo su indikativni, dok je ispitivanje otpornosti TDM (ISO13997) referentni rezultat funkcionalnosti.</i>	
EN 388:2016 + A1:2018 C. Otpornost na kidanje	> 25 njutna
EN 388:2016 + A1:2018 D. Otpornost na probijanje	> 20 njutna
EN 388:2016 + A1:2018 E. Otpornost na razrezivanje ISO	≥ 5 njutna
EN ISO 374-1:2016 + A1:2018 J	3 (>60 min)
EN ISO 374-1:2016 + A1:2018 K	6 (>480 min)
EN ISO 374-1:2016 + A1:2018 L	3 (>60 min)
EN ISO 374-1:2016 + A1:2018 M	6 (>480 min)
EN ISO 374-1:2016 + A1:2018 N	3 (>60 min)
EN ISO 374-1:2016 + A1:2018 O	6 (>480 min)
EN ISO 374-5:2016 Rukavice za zaštitu od mikroorganizama.	Zaštitne rukavice koje služe kao zaštitna barijera od mikrobioloških agensa. Nije testiran na viruse.

SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiChem® Cut™ with TRIttech™ 76-833

Permeation Breakthrough Times (BT)

Akrilna kiselina (79-10-7)	3 (91)	CENTEXBEL
Formaldehid (50-00-0)	6 (>480)	Kroschke
Sumporna kiselina 47% (7664-93-9)	6 (>480)	Kroschke
Etanol 92% (64-17-5)	6 (>480)	Kroschke
Etanol 70% (64-17-5)	6 (>480)	Kroschke
Izopropanol 99% (67-63-0)	6 (>480)	Kroschke
Izopropanol 70% (67-63-0)	6 (>480)	Kroschke
Benzin (8006-61-9)	3 (73)	Kroschke
Dizel (68476-34-6)	6 (>480)	Kroschke
Nafta (64742-88-7)	5 (276)	Kroschke
Acetonitril (75-05-8)	1	ATG accredited laboratory
Etil acetat (141-78-6)	1	ATG accredited laboratory
n-heptan (142-82-5)	4	ATG accredited laboratory
Heksan (110-54-3)	5	ATG accredited laboratory
izooktan (540-84-1)	6	ATG accredited laboratory
Metanol (67-56-1)	4	ATG accredited laboratory
Fosforna kiselina 85% (7664-38-2)	6	ATG accredited laboratory
Sumporna kiselina (7664-93-9)	3	ATG accredited laboratory

HandCare®

Dermatološki akreditirano od Skin Health Alliance	Da
REACH compliant	Da
OEKO-TEX® Standard 100 - 08.BH.57867 Hohenstein HTTI	Certificirano
Sanitized®	Da



Posebne značajke

Otporno na tekućine	Da
---------------------	----

SIGURNOSNO TEHNIČKI LIST ZA PROIZVOD

MaxiChem® Cut™ with TRIttech™ 76-833

Pakiranje

Pari po jednoj plastičnoj vrećici	12
Plastičnih vrećica po kartonskoj kutiji	6
Komada u kartonskoj kutiji	72
Dimenzije kartonske kutije (mm)	500 x 295 x 270

Težina

Raspon veličina	Veličina 7 (S)	Veličina 8 (M)	Veličina 9 (L)	Veličina 10 (XL)	Veličina 11 (XXL)
Težina rukavica / par (+/-6 gram)	144	109	158	164	170
Bruto težina (kg)	11.4	11.8	12.4	12.8	13.2
Težina kutije (kg)	1	1	1	1	1
Neto težina (kg)	10.4	10.8	11.4	11.8	12.2

Datum izdavanja: 29/10/2025

